

Summit HP Radial Trac II

This Limited Warranty / Adjustment Policy provides for tire replacement under specified conditions. This policy applies to Summit tires used in normal highway service (commercial applications excluded) displaying warrantable conditions. Tires that become unserviceable or wear out because of neglect or mistreatment are excluded from Summit warranty coverage.

Warranty Eligibility

This Workmanship and Materials warranty applies to every Summit replacement passenger car or light truck tire bearing the Summit brand name and complete Department of Transportation serial identification number while operated in normal highway use (commercial applications excluded).

These tires are covered by this warranty for the life of the original usable tread depth (the original tread depth down to the level of treadwear indicators molded at 2/32 inch) or for 48 months from the date of purchase (proof of purchases required).

This warranty applies only to the original tire purchaser, and is not transferrable to any other party. This time period does not represent the expected service life for tires covered by this warranty.



WHAT IS NOT COVERED

Tires that have become unserviceable for the following reasons:

- Improper repairs or repairs that have failed.
- Improper inflation or other maintenance abuses.
- Improper application of tire size and / or specification.
- Improper mounting / dismounting procedures or tire/wheel assembly balance.
- Mechanical irregularities in the vehicle or wheel, such as bent wheel assemblies, misalignment, worn or faulty components.
- Weather checking/cracking or failures resulting from these conditions on tires purchased more than four years (48 months) prior to a warranty claim. If proof of purchase is not provided, the Department of Transportation (D.O.T.) serial number is used.
- Accident, corrosion, vandalism, fire or damages caused by nature.
- Tires used in commercial applications such as taxis, shuttle vehicles and couriers.
- Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks (whether repairable or not), abrasions or impact breaks.

Additional Exclusions

- Tires that have had material added after leaving a Summit Tire distribution centre, such as fillers, sealants, balancing substances and external tire treatments or material of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty credit.

Additional Exclusions (continued)

- Tires submitted for ride disturbance complaints after 25% (2/32") treadwear.
- Tires branded by Summit to note special classification at time of purchase, such as "NA" (non-adjustable), or tires altered by notching or buffing.
- Tires used on vehicles in racing or special applications.
- Improper storage.

What Is Warranted

Tires that have become unserviceable for reasons other than stated in this warranty will be replaced in accordance with this warranty.

Adjustment Policy

Passenger and Light Truck Tires

When the original usable tread is worn 25% (2/32") or less, and a warrantable condition is found, the tire will be replaced with a comparable new Summit tire free of charge. During this period, tires will be mounted and balanced at the vehicle owner's expense. Other service charges such as tire rotation, alignment or applicable taxes are payable by the customer.

When a tire has worn past the above specified period for free replacement and a warrantable condition is found, the customer must pay for the cost of a new comparable Summit passenger or light truck tire on a prorated basis. The dealer shall determine this cost by multiplying the percentage of usable tread worn by the current retail selling price (Suggested Retail Price x 80%) of that tire at the time of warranty replacement. The cost of mounting, balancing and any other service charges or applicable taxes are payable by the customer.


OWNERS OBLIGATION

The Warranty Claim Policy applies only if all of the following conditions are met:

- You are the original purchaser of the tire in question.
- The original purchase receipt is presented at the time the claim is submitted.
- The tire was installed by an authorized dealer/distributor at the time of purchase.
- The tire is the appropriate size and load range for the vehicle according to the vehicle manufacturer's recommendation.

Tire Rotation

For maximum mileage, rotate your tires every 5,000 miles. Follow the correct rotation patterns.

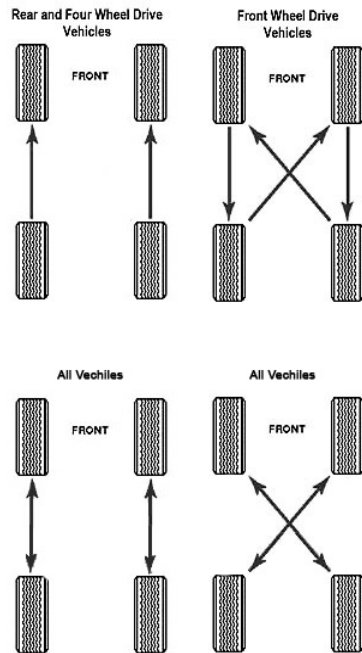

SAFETY RECOMMENDATIONS

Any tire, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use. To reduce the risk of tire failure, SUMMIT recommends the following:

1. CHECK the pressure in your tires at least once a month and only when the tires are cool (after the vehicle has been stopped for three hours and then driven less than a mile). Do not reduce pressure when tires are hot. Use a tire gauge to check the pressure and maintain it at the level recommended by the vehicle manufacturer.
2. CHECK your tires often for scrapes, bulges, separations, cuts or snags resulting from use. See your SUMMIT dealer immediately if any such condition is discovered. NEVER overload your tires. The maximum load carrying capacity of tires is molded on the sidewall of the tire.
3. NEVER drive on smooth tires. Tires should be removed when 2/32nds inch of tread depth remains, indicated by tread wear indicators molded into the tire tread. In most states, it is illegal to drive with less than 2/32nds inch remaining tread depth.
4. WHEN TWO TIRES are being replaced, the two newer tires should be installed on the rear axle, unless the new tires have a lower speed rating than the front tires. New tires on the rear axle help the driver more easily maintain control on wet roads since deeper treaded tires are better at resisting hydroplaning.

Visit Your Local SUMMIT Dealer For Assistance

Or Call (866) 882-1612 For The Closest Dealer

SURE Tire, 935 Main Plaza Drive, Wentzville, MO 63385



HP Radial Trac II



KEY BENEFITS

- Steel-belted construction with spiral nylon overlay for strength and high performance stability
- Unique tread design provides excellent high speed handling
- Superior traction on both wet and dry surfaces